


**ULINE** H-3917, H-3918  
H-3919, H-3920  
**PALLET RACK NETTING**

1-800-295-5510  
uline.com

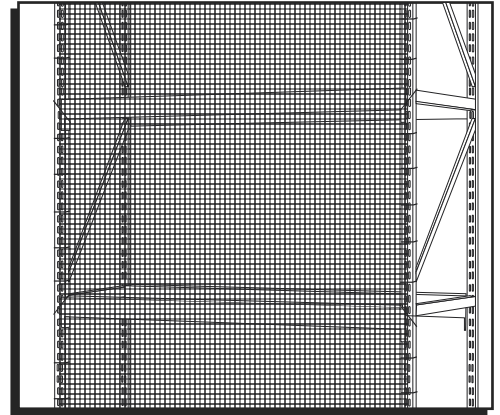

## INSTRUCTIONS

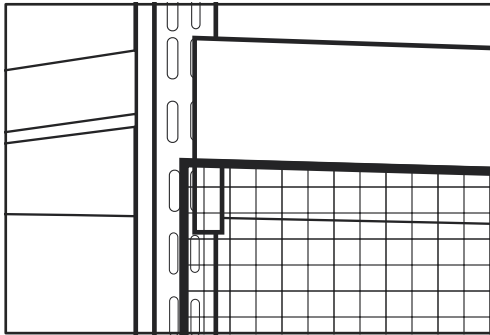


Figure 1

1. Align the pallet rack netting with the center of the upright and the bottom of the shelf beam. (See Figure 1)

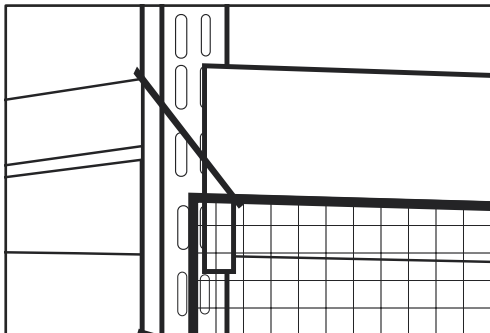


Figure 2

2. Secure the corner of the pallet rack netting with a cable tie. (See Figure 2)


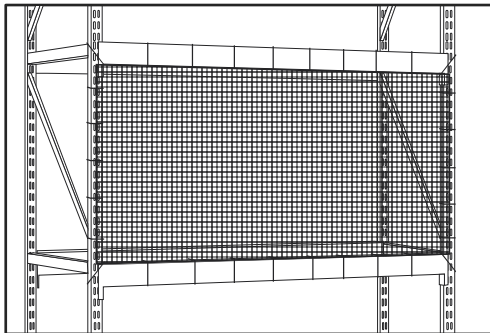


Figure 3

3. Secure the rest of the pallet rack netting with a cable tie every 12" on each side. (See Figure 3)



**NOTE:** Bottom of pallet rack netting should be aligned with the top of a shelf beam.

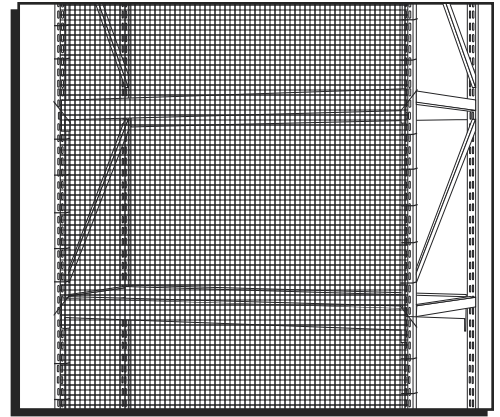

## INSTRUCCIONES

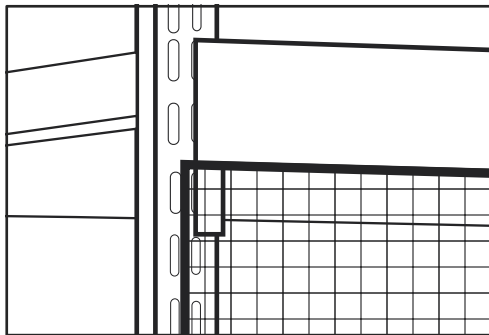


Diagrama 1

1. Alinee la red para rack de tarimas con el centro del marco vertical y la parte inferior de la viga de repisa. (Vea Diagrama 1)

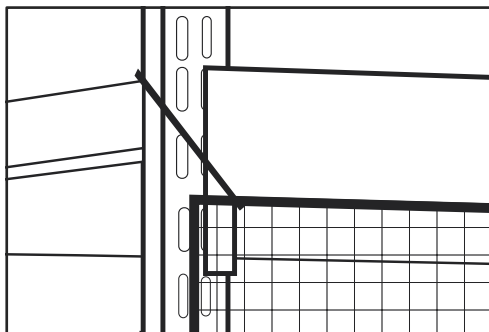


Diagrama 2

2. Fije la esquina de la red con un cincho para cables. (Vea Diagrama 2)


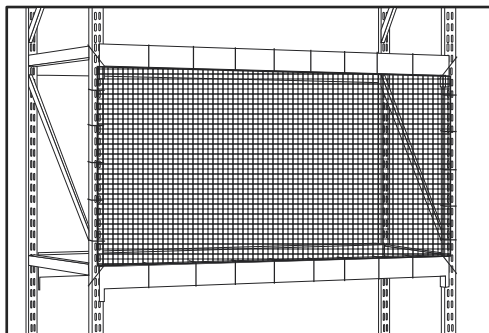


Diagrama 3

3. Fije el resto de la red para rack de tarimas con un cincho para cables cada 30.5 cm (12") en ambos lados. (Vea Diagrama 3)



**NOTA:** La parte inferior de la red para rack de tarimas deberá alinearse con la parte superior de una viga de repisa.

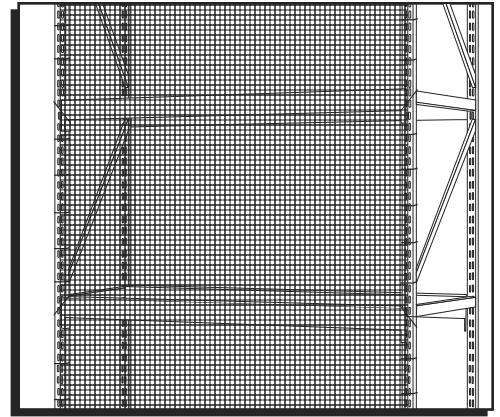

## INSTRUCTIONS

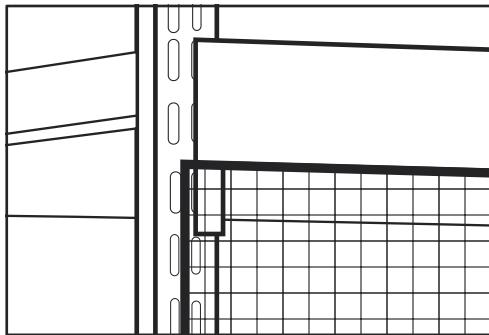


Figure 1

1. Alignez le filet de support à palette avec le centre du montant et la partie inférieure de la traverse de soutien. (Voir Figure 1)

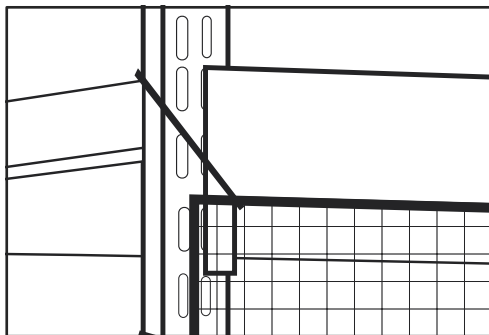


Figure 2

2. Fixez le coin du filet de support à palette avec un attache-câble. (Voir Figure 2)

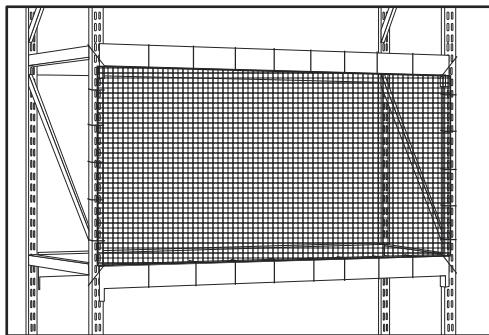


Figure 3

3. Fixez le reste du filet de support à palette avec un attache-câble tous les 30,5 cm (12 po) de chaque côté. (Voir Figure 3)



**REMARQUE :** Le bas du filet de support à palette doit être aligné avec la partie supérieure d'une traverse de soutien.