

# ULINE

## TAPE GUIDE

### WHICH TAPE SHOULD I USE?

FEATURE	Uline Industrial	Uline Economy	Uline Natural Rubber
Adhesion to Corrugated	Excellent	Good	Excellent
Application Temperature Range	-18° – 60°C (0° – 140°F)	10° – 43°C (50° – 110°F)	-18° – 66°C (0° – 150°F)
Clarity	Excellent	Good	Good
Moisture Resistance	Very Good	Fair	Very Good

### WHICH MIL SHOULD I USE?


CARTON WEIGHT	0"	20"	40"	60"	80"	100"
65-90 LBS.						3.5 MIL
50-65 LBS.					3.0 MIL	
35-50 LBS.				2.5-2.6 MIL		
15-35 LBS.			2.0 MIL			
0-15 LBS.		1.7-1.8 MIL				

**BOX LENGTH + WIDTH + HEIGHT**

### HELPFUL HINTS

- Always seal boxes with one strip of tape.
- If you are using 2 strips of 2" tape, try a 3" tape or a thicker mil. This will save time and money.

2"	<ul style="list-style-type: none"> <li>• For boxes 15" wide or less.</li> </ul>
3"	<ul style="list-style-type: none"> <li>• Boxes over 16" wide.</li> <li>• Underfilled RSC boxes.</li> <li>• Overstuffed boxes.</li> <li>• Difficult to adhere surfaces.</li> </ul>

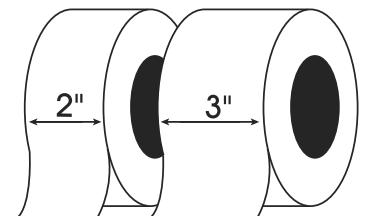

**1-800-295-5510** [uline.ca](http://uline.ca)